PULSATION DAMPENER
Model : A040

Spec. sheet no. AD00-04

Service intended
It is used for reducing the pressure pulsation flowing from pump or air compressor in order to facilitate pressure gauge reading.



Standard features
Max. working temperature : 232 ºC
Packing : PTFE (-54 ~ 232 ºC)
Max. static pressure up to 35 MPa

※ This product's Max. working temperature could be varied depending on its working pressure and temperature.

Main order — Ordering information

1. Base model
A040 Pulsation dampener

2. Unused type
A None

3. Material
D 316SS
F 316L SS
G Monel
Z Other

4. Gauge connection size
0 ¼"
1 ⅜"
2 ½"
9 Other

5. Gauge connection type
A PF (F)
B PT (F)
C NPT (F)
Z Other

6. Process connection size
B ¼"
C ⅜"
D ½"
Z Other

7. Process connection type
G PF (M)
H PT (M)
J NPT (M)
Z Other


8. Unused character
A0000 None

Sample ordering code

1	2	3	4	5	6	7	8
A040	**A**	**D**	**0**	**A**	**B**	**G**	**A0000**

© WISE Control Inc. All rights reserved. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

A040 : Type of mounting

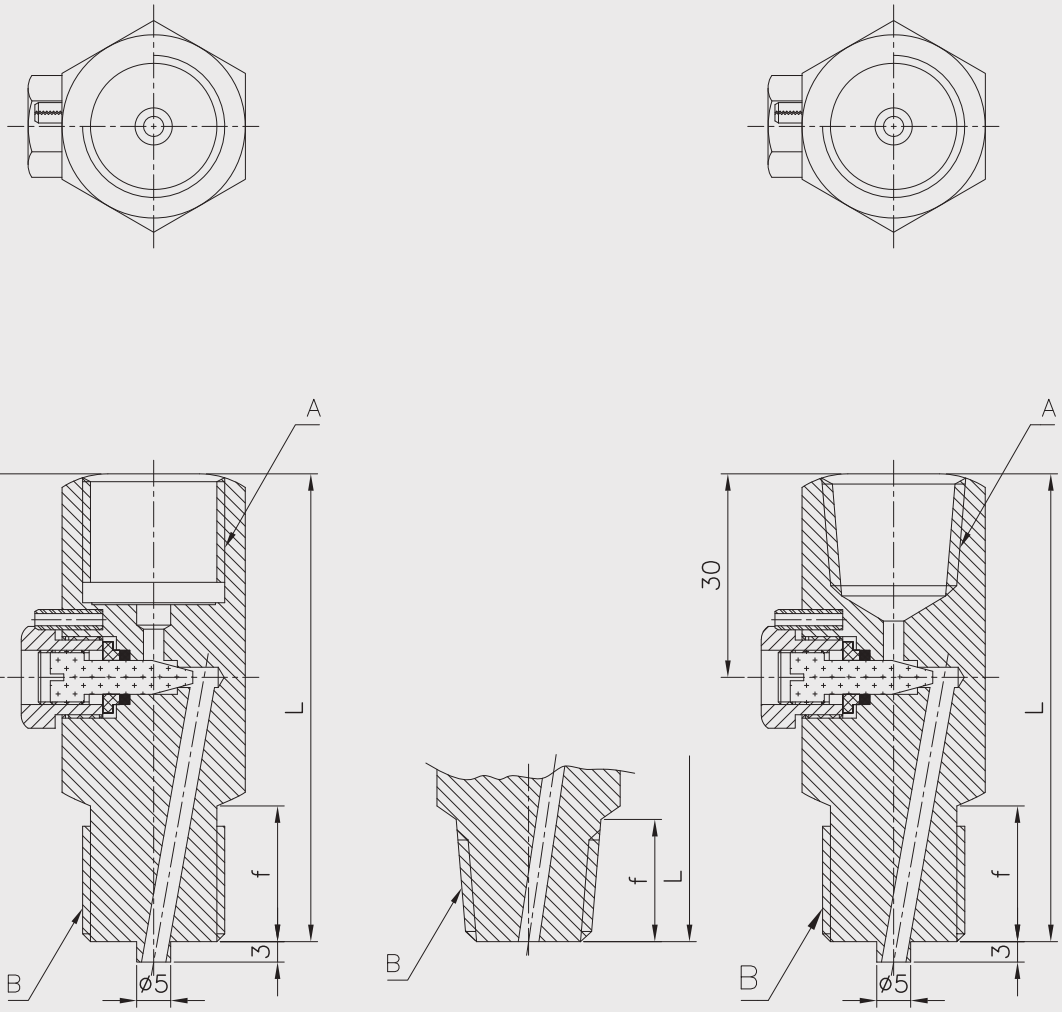

Dimensions (mm)

A	B	f	L
PF3/8	PF3/8	18	63
	PF1/2	20	63
PF1/2	NPT3/8	16	63
	NPT1/2	18	63
NPT3/8	PF3/8	18	63
	PF1/2	20	63
NPT1/2	NPT3/8	16	63
	NPT1/2	18	63