

WISE WORLDWIDE.

THE MIDDLE EAST	AFRICA	THAILAND
SAUDI ARABIA	SOUTH AFRICA	INDONESIA
UNITED ARAB	NIGERIA	SINGAPORE
EMIRATES	EGYPT	VIETNAM
OMAN		PHILIPPINES
KUWAIT	EAST ASIA	MALAYSIA
PAKISTAN	KOREA	
LIBYA	JAPAN	NORTH AMERICA
IRAN	CHINA	UNITED STATES
	HONG KONG	CANADA
EUROPE	TAIWAN	
GERMANY		SOUTH AMERICA
RUSSIA	SOUTH EAST ASIA	COLOMBIA
FRANCE	AUSTRALIA	PERU

PORTFOLIO

ORGANIZATION.



QR 코드를 스캔하여 1,700개 이상의 WISE 제품 전체 라인업을 확인해 보세요.
Scan the QR code to explore our full lineup of 1,700+ WISE products.

HEAD OFFICE
2022, Deogyong-daero, Giheung-gu, Yongin-si, Gyeonggi-do, 17097, Republic of Korea
webmaster@wisecontrol.com | www.wisecontrol.com

SEOUL OFFICE
19F, 181, Gasan digital 1-ro, Geumcheon-gu, Seoul, Republic of Korea

BUCHEON PLANT
#1201~1214, 122, Jomaru-ro 385beon-gil, Wonmi-gu, Bucheon-si, Gyeonggi-do, Republic of Korea

SIHWA PLANT
13, Emtibeui 26-ro 20beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea

SHANGHAI PLANT
Room101, No.1, 266, Zhongchuang Rd. Songjiang District, Shanghai, China

VIETNAM OFFICE
17 Floor, Office Block of the Charmvit Tower, Grand Plaza, 117 Tran Duy Hung Street, Cau Giay District, Hanoi. Vietnam

- Temperature Instruments
- Pressure Instruments
- Flow & Level Instruments
-






PORTFOLIO


WISE

Contents




01.	Company Overview	06
02.	Company History	08
03.	Product Portfolio	
	Ultra High Purity	10
	Pressure	12
	Temperature	16
	Flow & Level	22
04.	Certificates	24
05.	Experience List	26

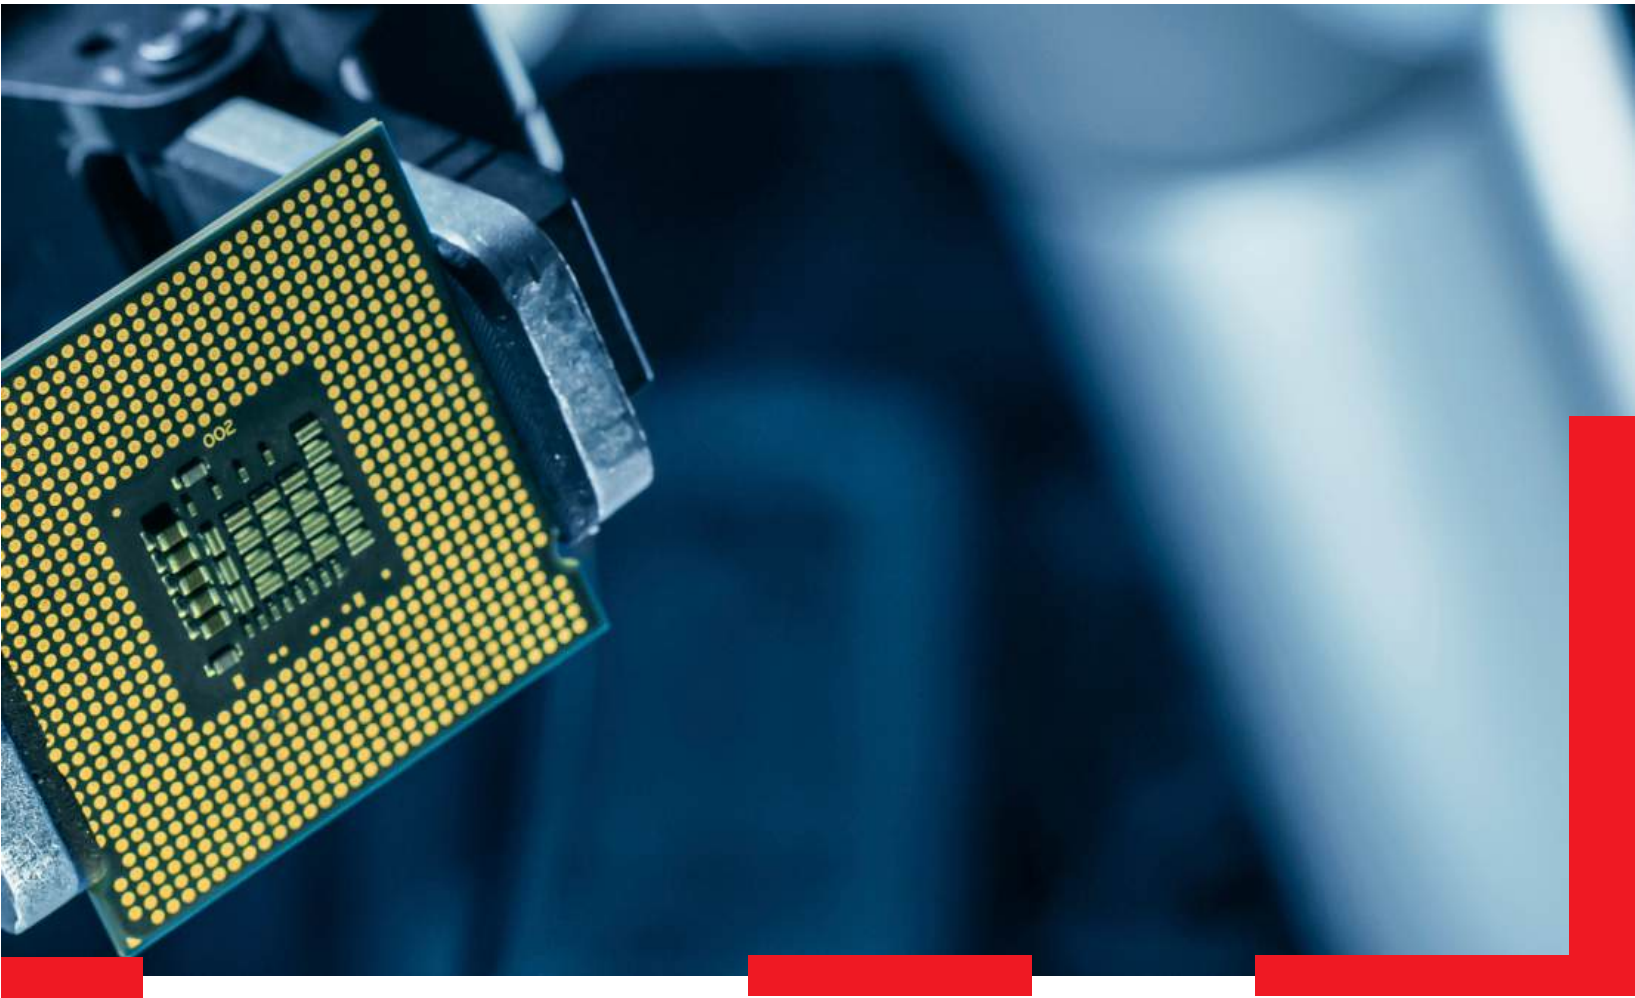

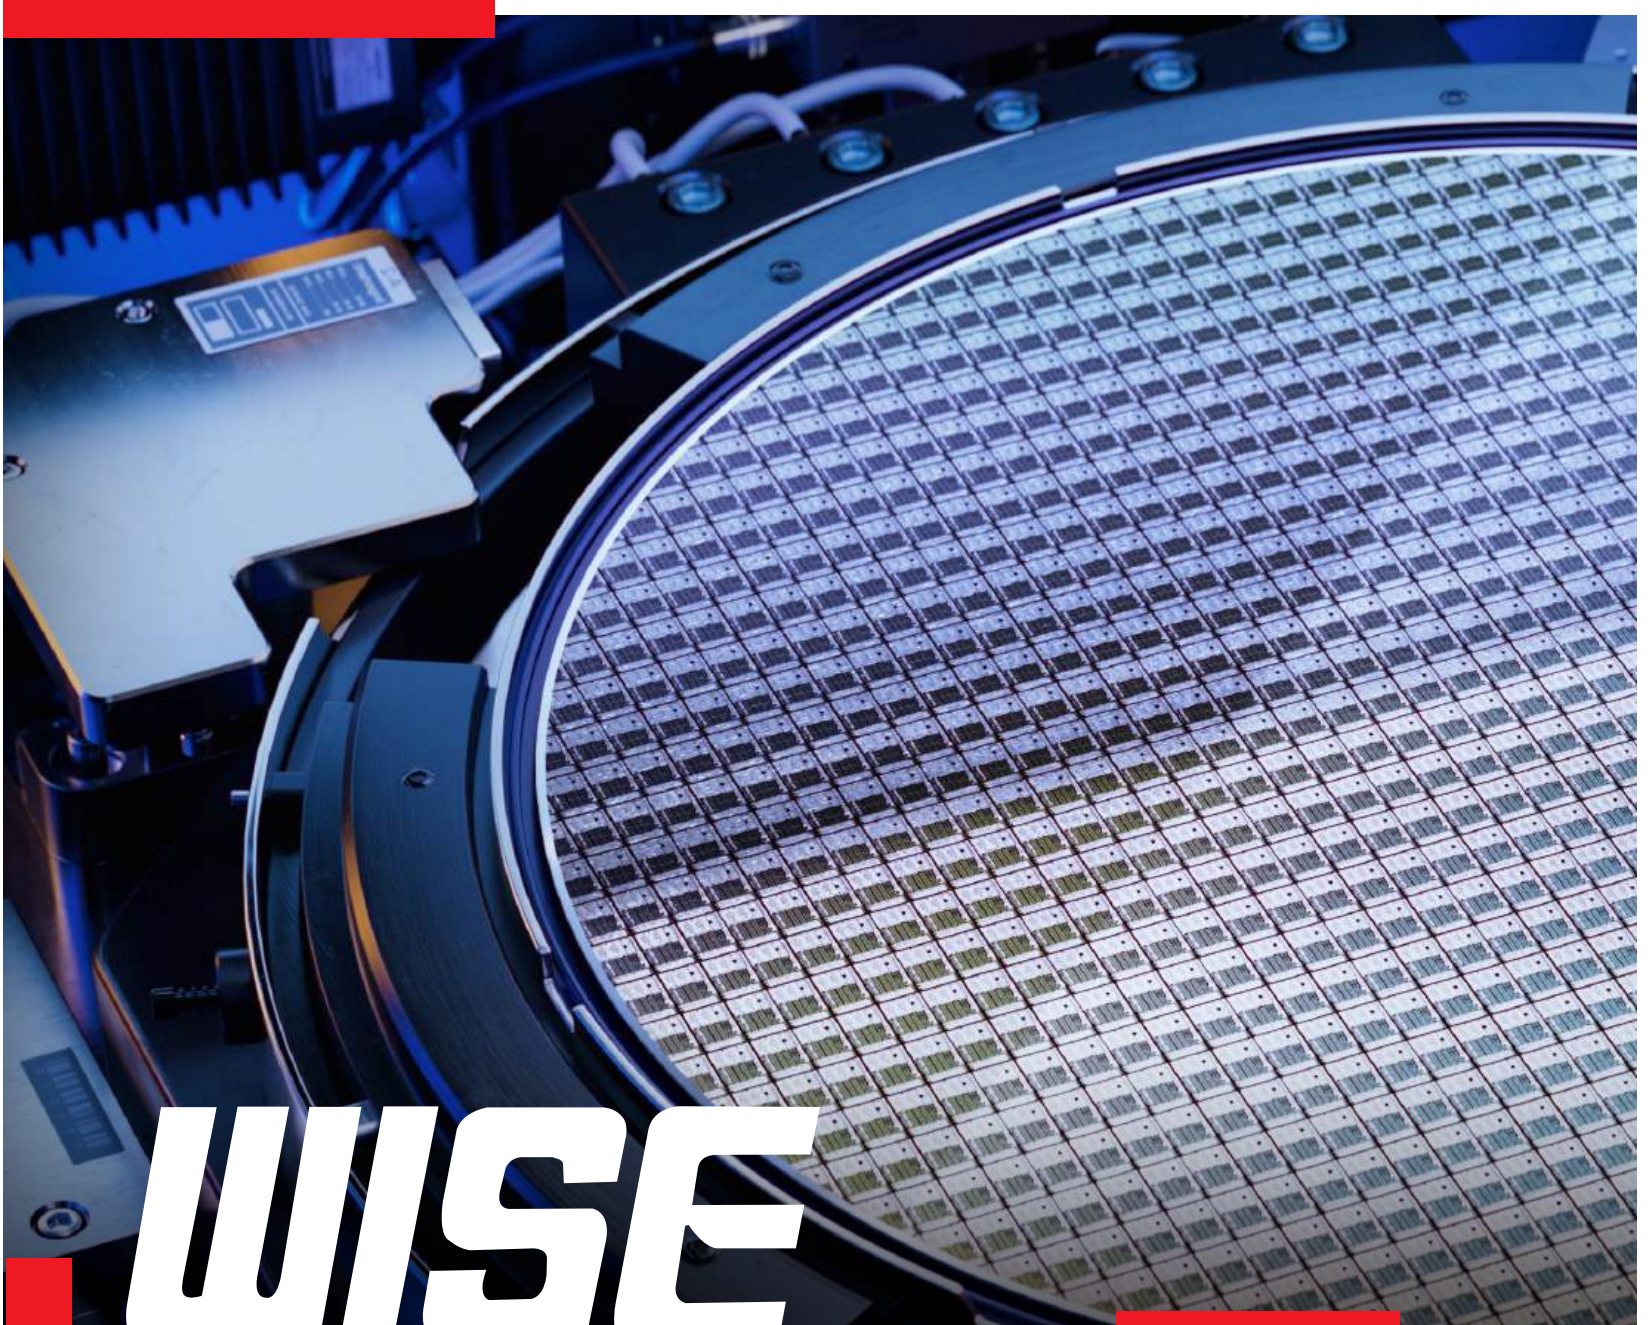

About

For more than 60 years, the name WISE has been standing for innovation and quality in the field of pressure, temperature and gas measurement. WISE is comprised of several products divisions, state-of-the art manufacturing facilities, service center and over 60 distributors worldwide. WISE is a unique organization of individuals linked by the pursuit of excellence in product design, manufacture, service and distribution. Major markets served by WISE include the power generating industry, oil & gas, petrochemical and chemical processing, the pulp & paper industry, semiconductor manufacturing, the metallurgical industry, biopharmaceutical and food & beverage industry.

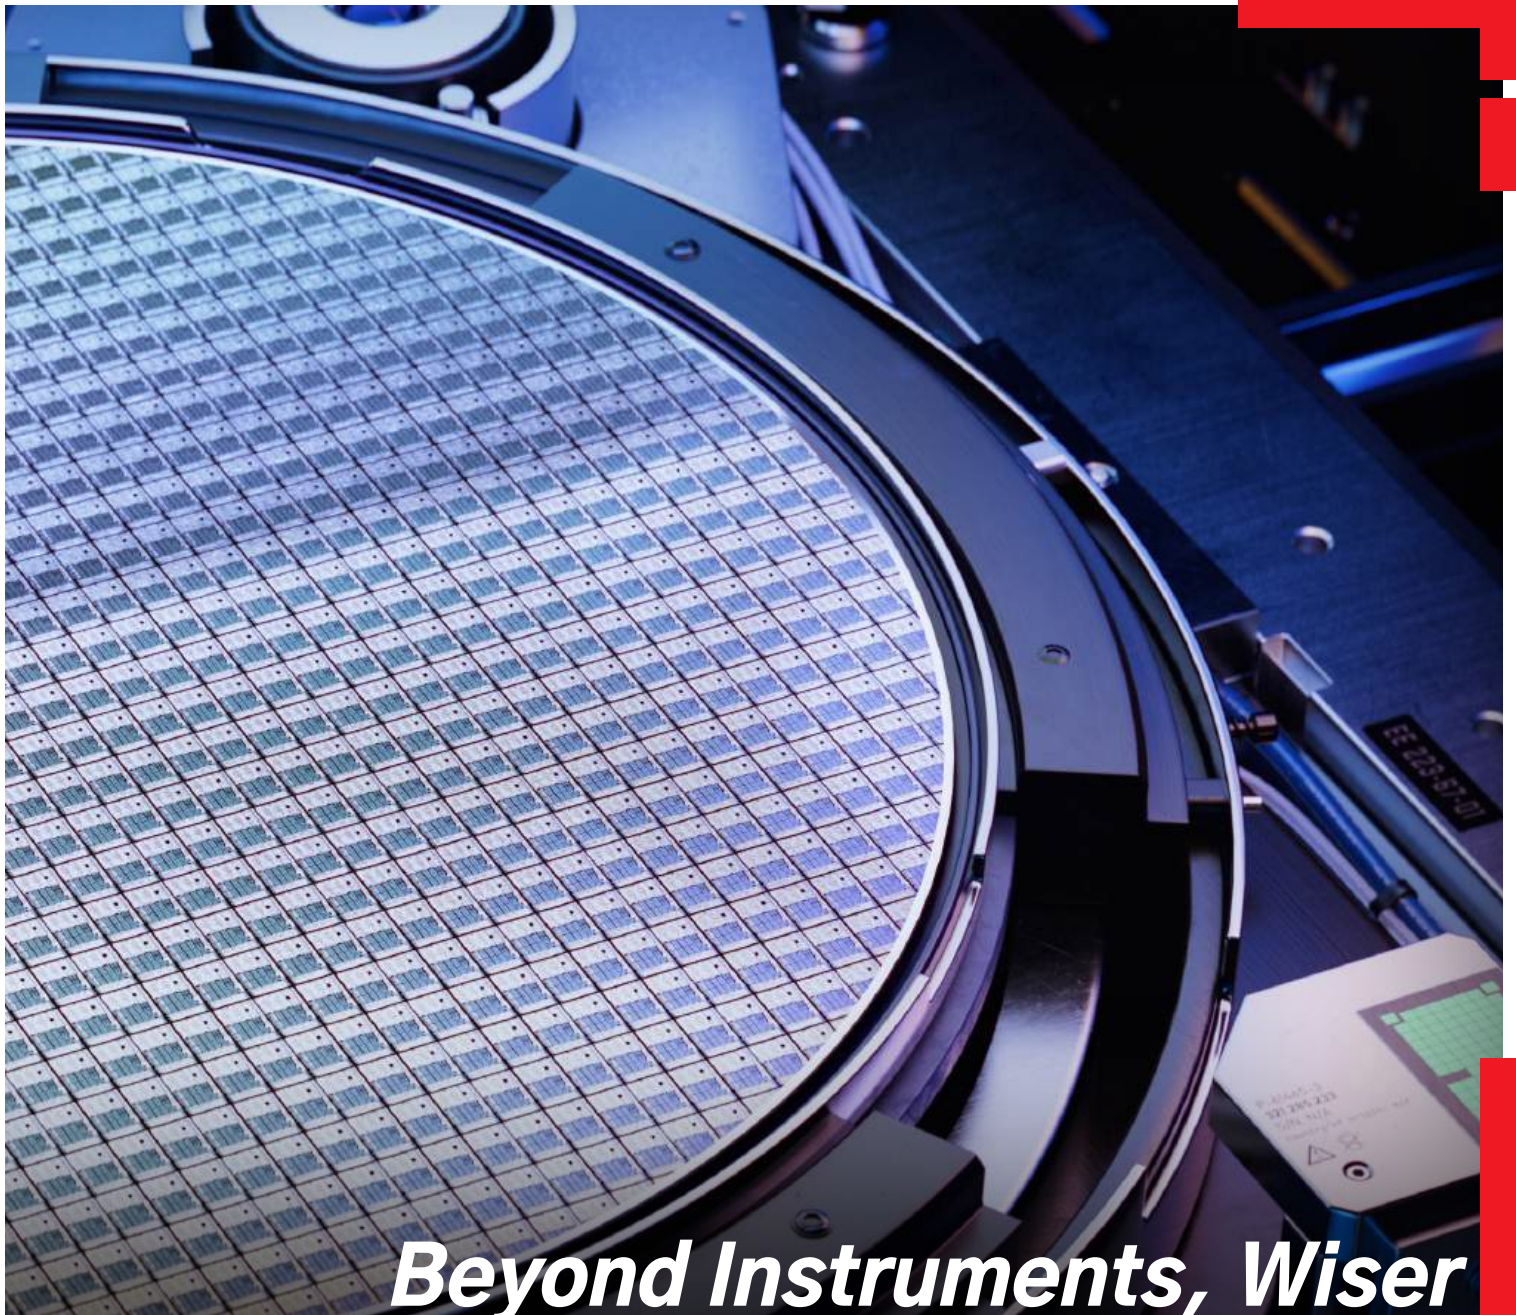

Beyond Instruments, Wiser

WISE will continue its efforts to make WISE products an integral part of the development plans of its customers, the new and exciting challenges will be met by building on a successful past rooted in recognizing and responding to customer needs, designing and producing quality products to meet those needs, proving premier customer service, and building strong & lasting business relationship.



History

1965.05

Establishment of Woojin Instrument
Industry Co., Ltd

1986.12

Establishment of an Affiliated
Research Institute

2008.01

Wise Bucheon Factory Established

2008.05

Establishment of Shanghai Corporation

2018.07

Wise Seoul Office Established

2020.01

The Relocation of Wise Sihwa Plant
Was Established

2025.12



Establishment of Vietnam Office

Employees

300+



Credit Rating

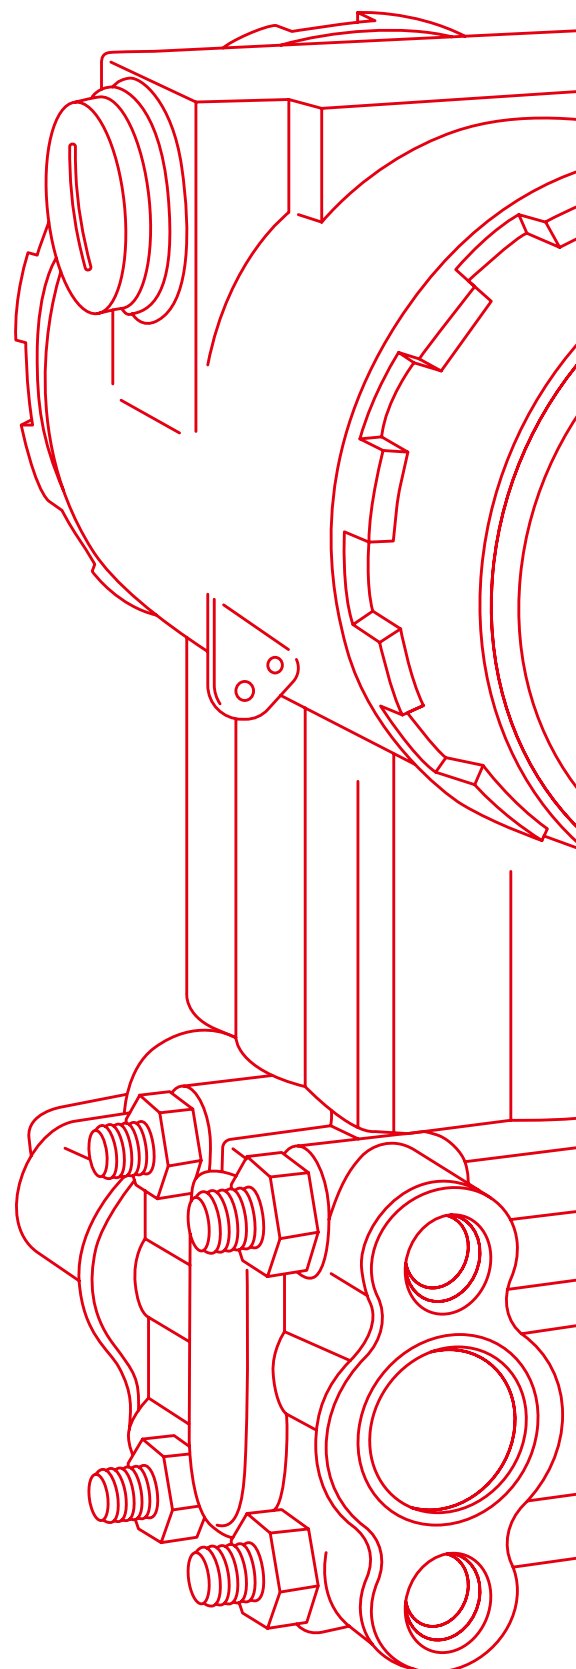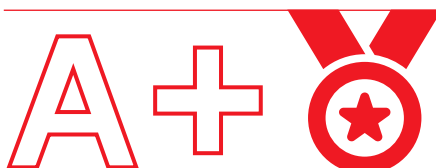

WISE is comprised of several products divisions, state-of-the-art manufacturing facilities, service center and over 60 distributors worldwide.


Domestic and Overseas Agency




Revenue CAGR



Business Partners

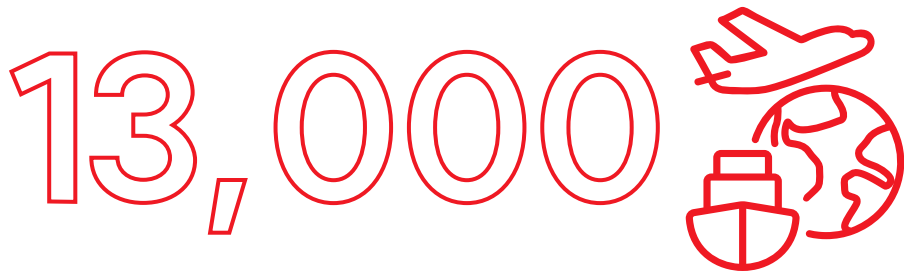

Total Units Supplied

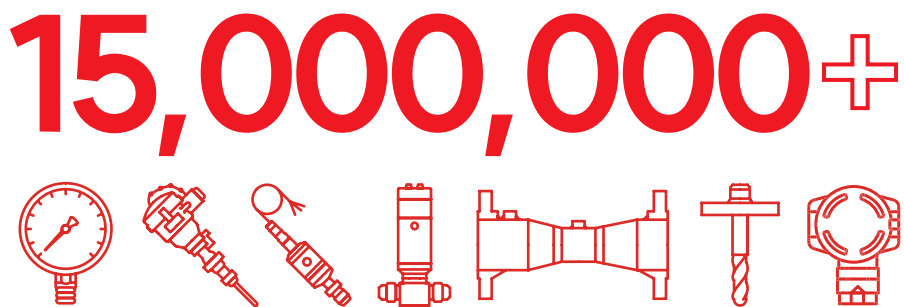



Scan the QR code to
explore our UHP products

Ultra High Purity

Ultra High Purity(UHP) measurement is a key technology for guaranteeing the highest quality in semiconductor and display industries. Precise control of ultra-pure gases and chemicals directly impacts yield and process stability. Our UHP solutions minimize contamination and maintain cleanliness, ensuring the highest level of reliability and precision required in cleanrooms and advanced manufacturing environments.

UPT Series

Ultra High Purity Pressure Transmitter



UPT100, UPT200

Display Type PT

ACCURACY: $\pm 0.5\%$ of full span
PRESSURE RANGE: $-0.1 \sim 0$ to $0 \sim 1$ MPa
WORKING TEMPERATURE: $-20 \sim 80^\circ\text{C}$
PRESSURE CONNECTION:
 1.125" W or C Seal
 Surface finish $Ra \leq 0.13\mu\text{m}$
 • Swivel male or female face seal fitting



UPT300

High Performance PT

ACCURACY: $\pm 0.2\%$ of full span
PRESSURE RANGE: $-0.1 \sim 0$ to $0 \sim 35$ MPa
WORKING TEMPERATURE: $-20 \sim 80^\circ\text{C}$
PRESSURE CONNECTION: 316L SS
 Surface finish $Ra \leq 0.13\mu\text{m}$ Double melt
 • Swivel male or female face seal fitting
EXPLOSION PROTECTION: Ex ia, nA, e



UPT400

High Performance PT

ACCURACY: $\pm 0.2\%$ of full span
PRESSURE RANGE: $-0.1 \sim 0$ to $0 \sim 1$ MPa
WORKING TEMPERATURE: $-20 \sim 80^\circ\text{C}$
PRESSURE CONNECTION: 316L SS
 Surface finish $Ra \leq 0.13\mu\text{m}$ Double melt
 • 1.125" W or C Seal



UPT700

Hybrid Thermo-Pressure PT

ACCURACY: $\pm 0.2\%$ of full span
TEMPERATURE: $\pm (0.15 + 0.002 |t|)$
PRESSURE RANGE: $-0.1 \sim 21$ MPa
WORKING TEMPERATURE: $-20 \sim 80^\circ\text{C}$
PRESSURE CONNECTION: 316L SS
 Surface finish $Ra \leq 0.13\mu\text{m}$ Double melt
 • Swivel male or female face seal fitting
 • 1.125" W or C Seal


UPT Series

Ultra High Purity Pressure Transmitter



PT850

ACCURACY: $\pm 0.25\%$ of full span
WORKING TEMPERATURE:
 Ambient: $-20 \sim 70^\circ\text{C}$ | Fluid: $-20 \sim 100^\circ\text{C}$
PRESSURE CONNECTION: 316L SS,
 surface finish $Ra \leq 0.13\mu\text{m}$ Double melt



UPT861, UPT862, UPT863

ACCURACY: $\pm 0.25\%$ of full span
WORKING TEMPERATURE:
 Ambient: $-20 \sim 80^\circ\text{C}$ | Fluid: $-20 \sim 100^\circ\text{C}$
PRESSURE CONNECTION: 316L SS,
 surface finish $Ra \leq 0.13\mu\text{m}$ Double melt

UFS Series

Excess Flow Switch



UFS100

ALARM POINT: 5 / 10 / 25 / 50 / 100slpm
ACCURACY: $\pm 10\%$
WORKING TEMPERATURE: $-40 \sim 80^\circ\text{C}$
MATERIAL: 316L SS Double melt

UBS Series

Temperature Switch



UBS100

ENCLOSURE RATING: IP65
PERMISSIBLE TEMPERATURE:
 $-20 \sim 115^\circ\text{C}$

CPT Series

Acid Proof and Chemical Resistant Pressure Transmitter



CPT100

ACCURACY: $\pm 0.5\%$ of full span
PRESSURE RANGE: $0 \sim 400$ to 800kPa /
 $0 \sim 0.4$ to 0.8MPa
WORKING TEMPERATURE: $15 \sim 90^\circ\text{C}$
PROCESS CONNECTION: 1/4", 3/8",
 1/2" Straight MF, MP, PT Thread male



CPT200

DISPLAY: 3-digit display
ACCURACY: $\pm 0.5\%$ of full span
PRESSURE RANGE: $0 \sim 400$ to 800kPa /
 $0 \sim 0.4$ to 0.8MPa
WORKING TEMPERATURE: $15 \sim 90^\circ\text{C}$
PROCESS CONNECTION: 1/4", 3/8",
 1/2" Straight MF, MP, PT Thread male



CPT300

ACCURACY: $\pm 0.5\%$ of full span
PRESSURE RANGE: $0 \sim 400$ to 800kPa /
 $0 \sim 0.4$ to 0.8MPa
WORKING TEMPERATURE: $15 \sim 90^\circ\text{C}$
PROCESS CONNECTION: 3/4" Flow
 through MF

SMT Series

Smart Transmitter



SMT2000

ACCURACY: $\pm 0.05\%$ of span, $\pm 0.075\%$
 of full span
TURN DOWN: Adjustable up to 100:1
 range ability
DEGREE OF PROTECTION: IP66/IP67



Scan the QR code to explore
our Pressure products



PRESSURE

Pressure is a critical factor in ensuring process stability and safety. Our pressure measurement solutions provide precise monitoring and reliable control across industries such as semiconductors, petrochemicals, and power plants. With a broad product range and specialized features, we deliver optimal measurement solutions tailored to customer needs.

P100 Series

Brass Internal Pressure Gauge



P110

DIAL: 40, 50, 60, 75, 100, 150 and 200mm
 RANGE: 0~0.2 to 0~10MPa,
 -0.1~0 to 0~100MPa
 CASE: Black finished steel
 ELEMENT: Brass, 316SS



P140

DIAL: 60 and 100mm
 RANGE: -0.1~0 to 0~35MPa
 CASE: Polycarbonate
 ELEMENT: Brass, 316SS

P200 Series

Stainless Steel Internal Pressure Gauge



P221

DIAL: 40 and 50mm
 RANGE: 0~3.5MPa
 CASE: 304SS
 ELEMENT: 316SS



P252

DIAL: 63, 80, 100 and 160mm
 RANGE: -0.1~0 to 0~200MPa
 CASE: 304SS
 ELEMENT: 316SS



P256

DIAL: 100 and 160mm
 RANGE: -0.1~0 to 0~4MPa
 CASE: 304SS
 ELEMENT: 316SS



P257

DIAL: 63, 100 and 160mm
 RANGE: -0.1~0 to 0~200MPa
 CASE: 304SS
 ELEMENT: 316SS

P300 Series

Duplex Pressure Gauge(Special Type Gauges)



P336

DIAL: 100mm
 RANGE: 0~0.4 to 0~3.5MPa
 CASE: Black painted aluminium
 ELEMENT: 316SS



P338

DIAL: 110(W) x 110mm(H)
 RANGE: 0~1 to 0~1.2MPa
 CASE: Black painted aluminium
 ELEMENT: 316SS



P359

DIAL: 125mm
 RANGE: -0.1~0 to 0~200MPa
 CASE: PBTB
 ELEMENT: 316SS

P400 Series

Low Pressure Gauge



P421

DIAL: 100 and 150mm
RANGE: -35~0 to 0~35kPa
CASE: 304SS
ELEMENT: 316L SS



P422

DIAL: 100 and 150mm
RANGE: -35~0 to 0~2kPa
CASE: 304SS
ELEMENT: 316L SS



P428, P429

DIAL: 100 and 150mm
RANGE: -1~0 to 0~35kPa
UPPER FLANGE: 304SS, 316SS
DIAPHRAGM: 316L SS

P500 Series

Inductive & Electrical Contact Type Pressure Gauge



P500

DIAL: 100 and 160mm
RANGE: -0.1~0 to 0~200MPa
CASE: 304SS
ELEMENT: 316SS



P520

DIAL: 100mm
RANGE: -0.1~0 to 0~200MPa
CASE: 304SS
ELEMENT: 316SS



P530

DIAL: 100 and 150mm
RANGE: -0.1~0 to 0~100MPa
CASE: Black finished aluminium
ELEMENT: 316SS



P590

DIAL: 100mm
RANGE: -0.1~0.1 to -0.1~2MPa
CASE: 304SS
ELEMENT: 316SS

P600 Series

Differential Pressure Gauge & Switch



P620

DIAL: 100 and 160mm
RANGE: 0~1 to 0~50kPa / 0~0.1 to 0~1.5MPa
CASE: 304SS
ELEMENT: 316L SS, Monel



P640

DIAL: 150mm
RANGE: 0~25kPa to 0~0.25MPa / 0~0.4 to 0~2.0MPa
CASE: ALDC12.1, Black painted
ELEMENT: 316L SS, Model & Hastelloy-C



P660

DIAL: 100 and 160mm
RANGE: 0~4 to 0~40kPa / 0~60kPa to 0~2.5MPa
CASE: 304SS
ELEMENT: 316Ti, Duratherm600/316L SS



P670

DIAL: 100 and 160mm
RANGE: 0~4kPa to 0~2.0MPa
CASE: 304SS
ELEMENT: 316L SS, Monel and Hastelloy-C

P700 Series

Diaphragm Seal Type and Pressure Gauge



P710, P720, P730

RANGE: -0.1~2.5MPa to 0~35MPa
UNDER FLANGE: 304SS, 316SS, Monel, Hastelloy-C
DIAPHRAGM: 316L SS, Hastelloy-C, Titanium, Tantalum, Monel



P752S

DIAL: 50, 63, 80 and 100mm
RANGE: -0.1~0MPa to 0~5MPa
CASE: 304SS
DIAPHRAGM: 316L SS, Hastelloy-C
SYSTEM FILLING FOOD GRADE OIL: FDA Certified



P770

DIAL: 100 and 160mm
RANGE: 0~40kPa (Flange 150mm) to 0~2.5MPa (Flange 100mm)
UNDER FLANGE: 304SS, 316SS
DIAPHRAGM: 316Ti, Duratherm600



P790

FILLING LIQUID: Silicone oil
UNDER FLANGE: 304SS, 316SS, Titanium, Monel, Hastelloy-C
DIAPHRAGM: 316L SS, Hastelloy-C, Titanium, Tantalum, Monel

P800 Series

Ultra High Purity Pressure Gauge & Switch



P810, P820, P830

DIAL: 35, 50 and 63mm
RANGE: 0~28MPa
CASE: 304SS **ELEMENT:** 316SS
PROCESS CONNECTION: Surface finish $Ra \leq 0.25\mu m$ (P810, P820)



P840

DIAL: 50mm
RANGE: 0~28MPa
CASE: 304SS **ELEMENT:** 316SS
PROCESS CONNECTION: Surface finish $Ra \leq 0.25\mu m$



P850

DIAL: 28mm
RANGE: -0.1~0.2 to 0~1MPa
CASE: 304SS
ELEMENT: 316L SS
PROCESS CONNECTION: Surface finish $Ra \leq 0.25\mu m$



P870

DIAL: 50mm
RANGE: -0.1~0 to 0~1MPa
CASE: PP Resin
ELEMENT: PFA

P900 Series

General & Explosion Proof Pressure Switch



P940

RANGE: -0.1~0 to 0~35MPa
CASE: ALDC 12.1 (Silver gray painted)
ELEMENT: 316SS



P953 / P954

RANGE: 0.3kPa to 15MPa to -1.0~0.15bar
CASE: ALDC 12.1 (Silver gray painted)
ELEMENT: 316L SS, Monel, Hastelloy-C



P970

RANGE: 15kPa to 0.4MPa
CASE: ALDC 12.1 (Silver gray painted)
ELEMENT: 316L SS, Viton



P980, P990

DIAL: 100mm (P980) / 125mm (P990)
RANGE: -0.1~0 to 0~35MPa (P980), -0.1~0 to 0~40MPa (P990)
CASE: ALDC 12.1 (Silver gray painted)
ELEMENT: 316SS



Scan the QR code to explore
our Temperature products

TEMPERATURE

Temperature is a vital indicator that determines product quality and process efficiency. Even in demanding environments such as semiconductor manufacturing, pharmaceuticals, food processing, and power generation, our temperature measurement devices ensure fast and accurate response. They provide reliable management solutions and are an essential choice for consistent quality assurance.

T100 Series

Industrial Bimetal Thermometer



T110

DIAL: 50, 65, 75, 100, 125 and 150mm
CASE & COVER: 304SS
LOCATION OF STEM: Center back connection, Direct
WINDOW: Glass



T120

DIAL: 75 and 100mm
CASE & COVER: 304SS
LOCATION OF STEM: Bottom connection, Direct
WINDOW: Glass



T123

DIAL: 75 and 100mm
CASE & COVER: 304SS
LOCATION OF STEM: Bottom connection, Direct
WINDOW: Glass



T190

DIAL: 75, 100, 125 and 150mm
CASE & COVER: 304SS
LOCATION OF STEM: Center back with adjustable stem
WINDOW: Glass

T200 Series

Industrial Gas Filled Thermometer



T210

DIAL: 100 and 150mm
CASE & COVER: 304SS
WINDOW: Tempered safety glass



T213

DIAL: 100 and 150mm
CASE & COVER: 304SS
WINDOW: Tempered safety glass



T290

DIAL: 100 and 150mm
CASE & COVER: 304SS
WINDOW: Tempered safety glass

T300 Series

Safety Pattern Type Thermometer



T359

DIAL: 125mm
CASE & COVER: PBTB
WINDOW: Polycarbonate



T360

DIAL: 125mm
CASE & COVER: PBTB
WINDOW: Polycarbonate

T400 Series

Glass Thermometer



T400

CASE: Aluminium alloy
STEM: Brass, 316SS, 316L SS

T500 Series

Inductive & Electrical Contact Type Thermometer



T510

DIAL: 100 and 160mm
CASE & COVER: 304SS
WINDOW: Safety glass, Polycarbonate



T520

DIAL: 100mm
CASE & COVER: 304SS
WINDOW: Safety glass, Polycarbonate



T530

DIAL: 100mm
CASE & COVER: 304SS
WINDOW: Safety glass, Polycarbonate

T900 Series

General & Explosion Proof Temperature Switch(Micro Type)



T931, T932

DIAL: 150mm
CASE & COVER: Silver gray finished
WINDOW: Instrument glass
SWITCH TYPE: Micro switch snap action



T941, T942

CASE & COVER: Silver gray finished
SWITCH TYPE: Micro switch snap action



T953

CASE & COVER: Silver gray finished
WORKING TEMPERATURE: -40~65°C
SWITCH TYPE: Micro contact type



T990

CASE & COVER: Silver gray finished
SWITCH TYPE: Micro contact type

R100 Series

Metallic Protection Tube & Sheath Type Thermocouple



R110

ELEMENT: K, E, J, T
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class 2



R120(R Series)

ELEMENT: K, E, J, T, N
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class 1, Class 2

R200 Series

Metallic Protection Tube & Sheath Type RTD



R210

ELEMENT: Pt 100Ω at 0°C | TCR : 3,850ppm/k
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class A, Class B



R220

ELEMENT: Pt 100Ω at 0°C | TCR : 3,850ppm/k
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class A, Class B



R230

ELEMENT: Pt 100Ω at 0°C | TCR : 3,850ppm/k
HEAD MATERIAL: ALDC, 304SS
TOLERANCES ON TEMPERATURE
READING: Class A, Class B

R300 Series

Extension Lead Wire Thermocouple & RTD



R300

ELEMENT: Thermocouple: K, E, J, T, N, R, S, B | RTD: Pt 100Ω at 0°C
TOLERANCES ON TEMPERATURE
READING: Thermocouple: Class 1, Class 2 | RTD: Class A, Class B

R400 Series

Resistance Temperature Detector For Room And Refrigerator



R430

ELEMENT: Pt 100Ω at 0°C | TCR : 3,850ppm/k
HEAD MATERIAL: Aluminium casting
TOLERANCES ON TEMPERATURE
READING: Class A, Class B

R500 Series

Multi Point Thermocouple And RTD



R500

ELEMENT: Thermocouple : K, E, J, T, N | RTD: Pt 100Ω at 0°C
JUNCTION BOX MATERIAL: Aluminium (STD), Stainless steel
TOLERANCES ON TEMPERATURE
READING: Thermocouple: Class 1, Class 2 | RTD: Class A, Class B

R600 Series

Tubeskin Thermocouple And RTD



R600

ELEMENT: K, E, J, T, N | RTD: Pt 100Ω at 0°C
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class A, Class B, Class 1, Class 2

R700 Series

Non-metallic protection tube thermocouple



R700

ELEMENT: R, S, B, K
HEAD MATERIAL: ALDC, 304SS, 316SS
TOLERANCES ON TEMPERATURE
READING: Class 2, Class 3


R800 Series

Stator Winding RTD




R810

BODY MATERIAL: High temperature epoxy glass
TEMPERATURE LIMIT: Class F(155°C), Class H(180°C)



R820

BODY MATERIAL: High temperature epoxy glass
TEMPERATURE LIMIT: Class F(155°C), Class H(180°C)



R830

BODY MATERIAL: High temperature epoxy glass
TEMPERATURE LIMIT: Class F(155°C), Class H(180°C)

R900 Series

Explosion Proof T/C & RTD



R911 (with T900)

EXCITATION VOLTAGE: 18~30VDC

ACCURACY: $\pm 0.2\%$ FSO

AMBIENT TEMPERATURE LIMITS:

-40~65°C

AMBIENT HUMIDITY LIMITS: 5~95% R.H

OUTPUT: 4~20mA



R920 (RS series)

ELEMENT: Thermocouple: K, E, J, T, N |
RTD: Pt 100Ω at 0°C

HEAD MATERIAL: ALDC, 316SS

TOLERANCES ON TEMPERATURE

READING: Thermocouple: Class 1,
Class 2 | RTD: Class A, Class B



R940 (ETR series)

ELEMENT: Thermocouple: K, E, J, T, N |
RTD: Pt 100Ω at 0°C

HEAD MATERIAL: ALDC, 316SS

TOLERANCES ON TEMPERATURE

READING: Thermocouple: Class 1,
Class 2 | RTD: Class A, Class B



R950 (ETR10 series)

ELEMENT: RTD: Pt 100Ω at 0°C

ELECTRICAL RATING: 10mA 4VDC

BTT Series

Slim Type Temperature Transmitter with Integral Type Thermowell



BTT3000

PROCESS CONNECTION: G 3/8" (F)
(With well type)

MATERIAL: 316L SS

OUTPUT: 4~20mA



A7100

GAUGE CONNECTION: G 3/8" (M)

MATERIAL: 316L SS

PROCESS TEMPERATURE: -20 to 200°C



SMT3000

WORKING TEMPERATURE: Ambient:
-40~65°C

INPUT: Thermocouple: K, J, T, N, E, B, R,
S | RTD: Pt 100Ω at 0°C

OUTPUT: 4~20mA with HART Protocol



WTT-3100, WTT-3200

WORKING TEMPERATURE: -40~85°C

INPUT: Thermocouple: K, E, N, T, J, B, R,
S | RTD: Pt 100Ω at 0°C

OUTPUT: 4~20mA with HART Protocol

H100/H200/H300 Series


Space Heater



H100
HEATING ELEMENT: Ni-Cr(STD),
Fe-Cr, Kantal
TUBE MATERIAL: 304SS
AMBIENT TEMPERATURE: -40~70°C



H200
MATERIAL: Anodized aluminium(Black
color)
AMBIENT TEMPERATURE:
-60°C ≤ Tamb ≤ 115°C




H300
HEATING ELEMENT: Ni-CrT
UBE MATERIAL: 304SS, 316SS
AMBIENT TEMPERATURE:
T3: -60~140°C, T4: -60~115°C

UTE Series

Ultra High Purity Temperature Element




UTE100
ELEMENT: Thermocouple: K, E, J, T, N,
R, S, B | RTD: Pt 100Ω at 0°C
TOLERANCES ON TEMPERATURE
READING: Thermocouple: Class 1,
Class 2 | RTD: Class A, Class B



UTE200
ELEMENT: Thermocouple: K, E, J, T, N,
R, S, B | RTD: Pt 100Ω at 0°C
TOLERANCES ON TEMPERATURE
READING: Thermocouple: Class 1,
Class 2 | RTD: Class A, Class B



UTE300
ELEMENT: Thermocouple: K, E, J, T, N,
R, S, B | RTD: Pt 100Ω at 0°C
TOLERANCES ON TEMPERATURE
READING: Thermocouple: Class 1,
Class 2 | RTD: Class A, Class B

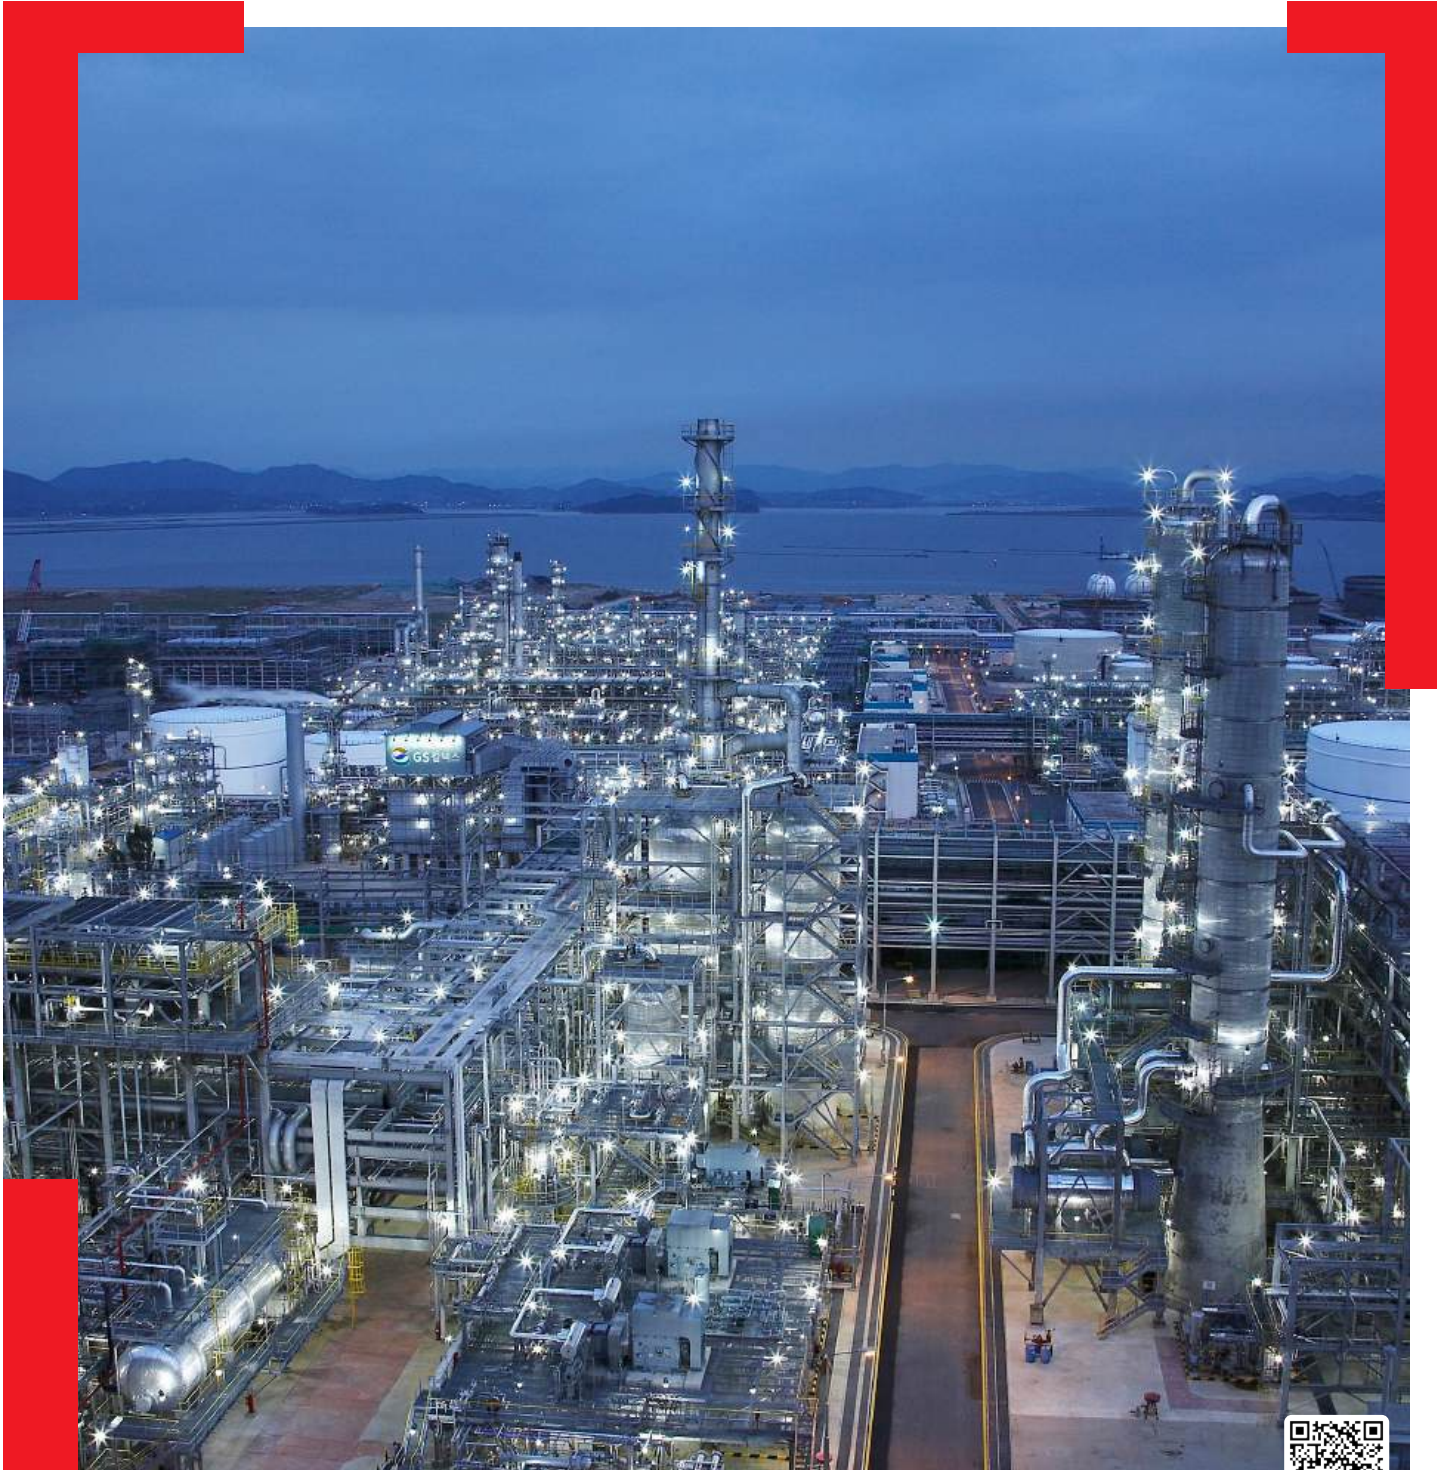

Scan the QR code to explore
our Flow & Level products

FLOW & LEVEL

Flow measurement is an essential technology for securing both productivity and safety. In industries such as semiconductors, water treatment, petrochemicals, and plant operations, our flow instruments deliver accurate monitoring to optimize processes and improve efficiency. Designed for reliability under diverse conditions, they enhance operational stability and customer competitiveness.

F Series

Flow Element



F100, F500, F510

LINE SIZE: DN15~DN1000(F100),
N25~DN600(F500), DN15~DN40(F510)
MATERIAL: Stainless steel, Hastelloy-C,
etc.



F600

LINE SIZE: 2B~25B(DN50~DN630)
PRESSURE TAPS: 1D and 1/2D tap,
Throat tap
MATERIAL: A182-F11, F22, F91,
A182-F304, A182-F316 / F316L



F700

LINE SIZE: 2B~48B(DN50~DN1200)
MATERIAL: Carbon steel, 304SS, 316SS
and 316L SS




F760, F761

LINE SIZE: F760(2B~40B), F761(4B~24B)
MATERIAL: 304SS, 316SS, 316L SS and
Monel


L Series

Level Gauge



L100

VISIBLE LENGTH: 90~3,695mm
MATERIAL: Carbon steel, Stainless steel,
etc.




L200

VISIBLE LENGTH: 195~3,695mm
MATERIAL: Carbon steel, Stainless steel,
etc.



L300

FLANGE RATING: 150~900Lb
MATERIAL: Stainless steel, CPVC, With
Lining, etc.
MAX.PRESSURE: 8MPa MAX.
TEMPERATURE: 350°C



L500, L510

MAX.PRESSURE: 10MPa(L500),
21.5MPa(L510), etc.
MATERIAL: Carbon steel

S Series

Sight Glass



S100, S110

LINE SIZE: DN8~DN25(S100),
DN15~DN400(S110), etc.
MATERIAL: Carbon steel, Stainless steel,
etc.
MAX.PRESSURE: 2.9MPa MAX.
TEMPERATURE: 300°C



S200, S210

LINE SIZE: DN8~DN25(S200),
DN15~DN400(S210), etc.
MATERIAL: Carbon steel, Stainless steel,
etc.
MAX.PRESSURE: 2.9MPa MAX.
TEMPERATURE: 300°C



S300, S310

LINE SIZE: DN8~DN25(S300),
DN15~DN400(S310), etc.
MATERIAL: Carbon steel, Stainless steel,
etc.
MAX.PRESSURE: 2.9MPa MAX.
TEMPERATURE: 100°C

Certificates List

ISO 9001



ISO 14001



ISO 45001



KEPIC




KS




KCs



ASME PP Stamp



ASME S Stamp



IECEX



3A



ATEX



PED



ABS



BV



LR



DNV



KR



HART



EAC



CSA



FM



PAC



NEPSI



ECAS



Global Vendor Registration Status

